

SHANGHAI GRATING

Steel Bar Grating in China With 80 Years of U.S. Experience

Vantek Materials Limited
榮建行材料有限公司

Vantek Limited
榮建行有限公司
Est. 2000

Vincent Chung 鍾崇雲
Sales Manager


Mobile (852) 9631 4268
Tel (852) 2409 6999
Fax (852) 2419 0033
Email vincent@vantekmaterials.com
Website www.vantekmaterials.com

Unit 2305, 23/F, Tower 2,
Metroplaza, 223 Hing Fong Road,
Kwai Fong, N.T., Hong Kong.


General Product Information

Features

Panel size:	1m × 6m nominal standard (other size are available)
Material:	Carbon structural steel (Stainless steel is available)
Finish:	Mill finished, Hot dip galvanized,Painted
Surface:	Plain bearing bares or Serrated bearing bars

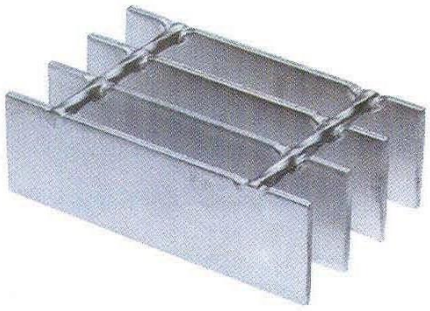


Plain Bearing Bars

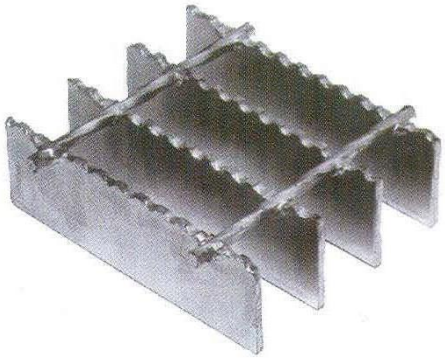

Serrated Bearing Bars

Quality Standards


Steel Grating Standard:	China YB-4001	U.S. NAAMM MBG531
Steel Standard:	China GB-700	U.S. ASTM A36
Hot Dip Galvanizing Standard:	China GB-2518	U.S. ASTM A123

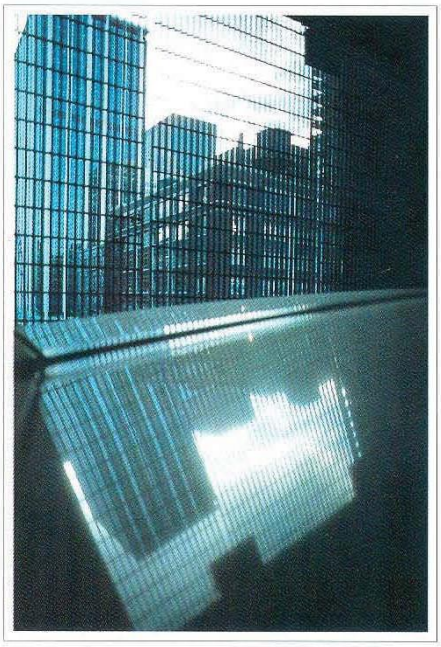





Handrail Specification

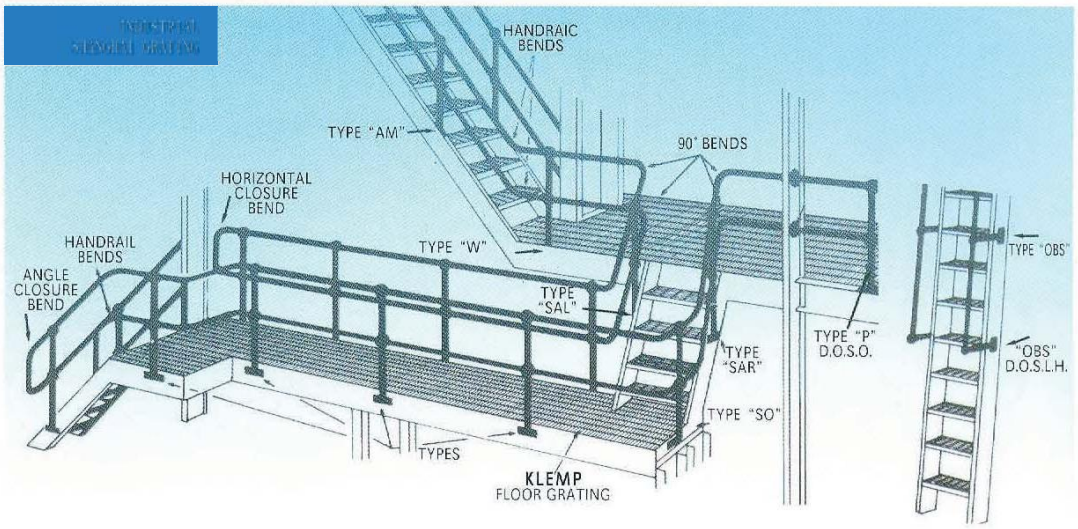

Unit: mm

Series	Type		Ball Size	Stanchion	Up Rail	Middle Rail	Height
Serie 1 (Single)	Standard	KS/1	Φ 66	Φ 42.3	Φ 33.5		Designed
	Heavy Duty	KH/1	Φ 76	Φ 48.0	Φ 42.3		
Serie 2 (Double)	Standard	KSa/2	Φ 66	Φ 42.3	Φ 33.5	Φ 26.8	1017
		KSb/2		Φ 42.3	Φ 33.5	Φ 33.5	
	Heavy Duty	KHa/2	Φ 76	Φ 48.0	Φ 42.3	Φ 33.5	1017
		KHb/2		Φ 48.0	Φ 42.3	Φ 42.3	
Serie 2 (Triple)	Standard	KSGa/2	Φ 66	Φ 42.3	Φ 33.5	Φ 26.8	1050
		KSGb/2		Φ 42.3	Φ 33.5	Φ 33.5	
	Heavy Duty	KHGa/2	Φ 76	Φ 48.0	Φ 42.3	Φ 33.5	1050
		KHGb/2		Φ 48.0	Φ 42.3	Φ 42.3	
Serie 3 (Triple)	Standard	KSa/3	Φ 66	Φ 42.3	Φ 33.5	Φ 26.8	1200
		KSb/3		Φ 42.3	Φ 33.5	Φ 33.5	
	Heavy Duty	KHa/3	Φ 76	Φ 48.0	Φ 42.3	Φ 33.5	1200
		KHb/3		Φ 48.0	Φ 42.3	Φ 42.3	

★ 1000,1200,1500mm Stanchion Distance Can Be Selected.

★ Handrail Height Can Be Designed By The Buyer.

★K S a/2
- Serie 2
- Light Rail
- Standard
- Trade Mark

K H b/3
- Serie 3
- Heavy Rail
- Heavy Duty
- Trade Mark






Hong Kong Job Reference








香港廸士尼樂園

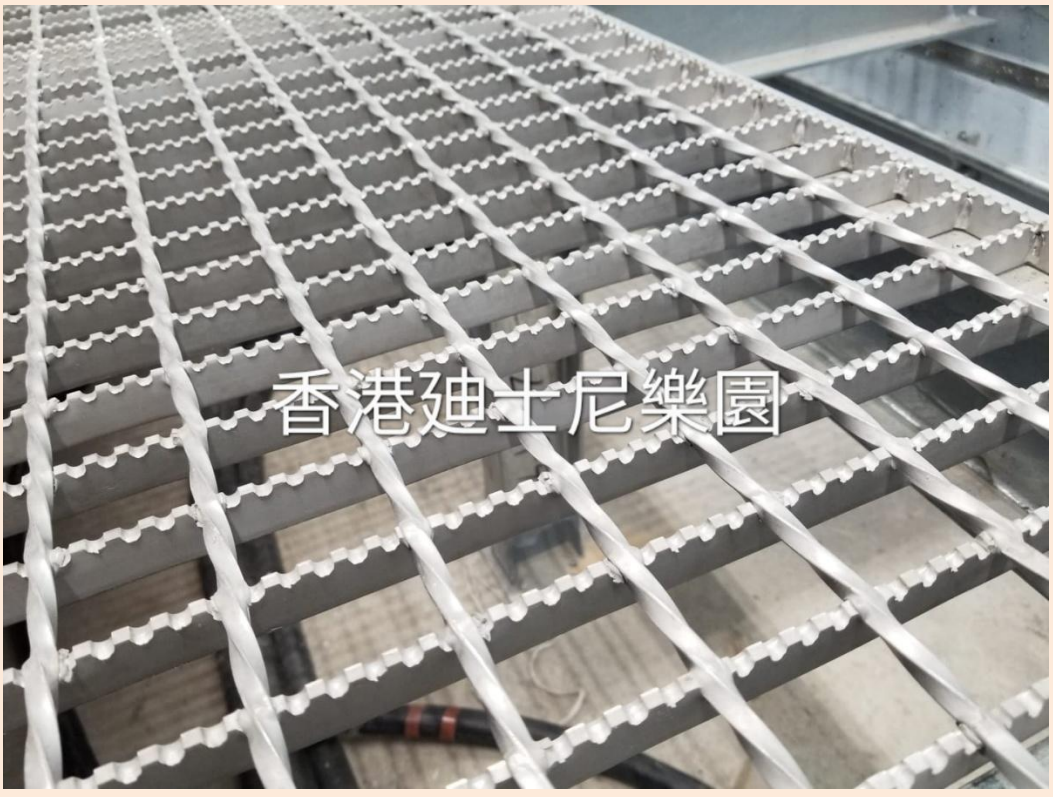
香港廸士尼樂園


MTR



